

FM75 EVO

TROLLEY MANUAL HEAT-SHRINK - FULL OPTIONAL - SEALING BAR 420X280 MM



DESCRIPTION

Minipack®-Torre has never renounced the pioneering spirit that has always accompanied it. It was precisely the invention of the first **chamber machine**, in fact, to decree the birth of the company over 40 years ago, with the first patent in 1976. But ideas cannot be stopped. Today, Minipack®-torre launches a new series that is the result of years of research and development and summarises all

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151




the qualities of its compact **packaging machines**: reliable, easy to use, durable.

TECHNICAL FEATURES

Electrical power supply	200V 1Ph 230V 1Ph
Maximum power installed	3,35 kW (200V) 3,45 kW (230V)
Maximum current	14,5 A (200V) 15 A (230V)
Hourly output	0-300
Available dimensions of the sealing bars	420x280 mm
MAX product size	400x250x160 mm
MAX Reel Dimensions (Ø x length)	Ø250x500 mm
Work Surface Height	925 mm
Machine dimensions (open hood)	1160x700x1220 mm
Machine dimensions (closed hood)	1160x700x1120 mm
Weight (Net/Gross)	112/136 kg

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.


TECHNICAL DRAWING



minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151



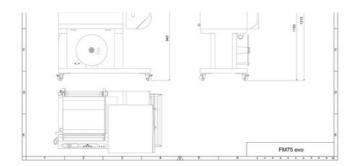

TECHNICAL SOLUTIONS

- High-performance steel resistors: shrinking time cut by 50% and heating time cut by 60%
- **Soft Shrink fan speed adjustment**: perfect heat-shrinking also on very light or flexible products. Sealed areas do not open. Extremely quiet. Exclusive patent
- **Comfort Zone Fan Stop**: the fan stop is a "green" solution that allows to save 20% more energy and provides greater operator comfort during packaging, since the fan stops when the chamber opens
- New latest-generation board: quality components. 4-digit display
- Waste rewinder: productivity up by 20%
- Sealing bar cooling: increased productivity and improved sealing.